

BASECOAT C300

One component acrylic basecoat lacquer offers fast-dry characteristics and provides excellent gloss and depth of colour. Exceptionally easy to apply with minimal wastage, the C300 is used in clear over base systems for solid, metallic and pearl colours.

PROPERTIES

- User friendly, very easy application and accurate colour matching.
- Highly compatible with most clearcoats.
- Perfect aluminium flake control in metallics.
- Fast drying with excellent colour retention.
- Can be used for overall, panel and spot repair.

SUBSTRATES


- ALL OEM finishes and Corium primers.

PRODUCTS

- CT** Corium Tints
CB 50 Corium Basecoat Binder
CB 60 Corium Basecoat Balancer
CS 6000 Corium 2K Fast Thinner
CS 6600 Corium 2K Standard Thinner
CS 6900 Corium 2k Slow Thinner



Clear Over Base System

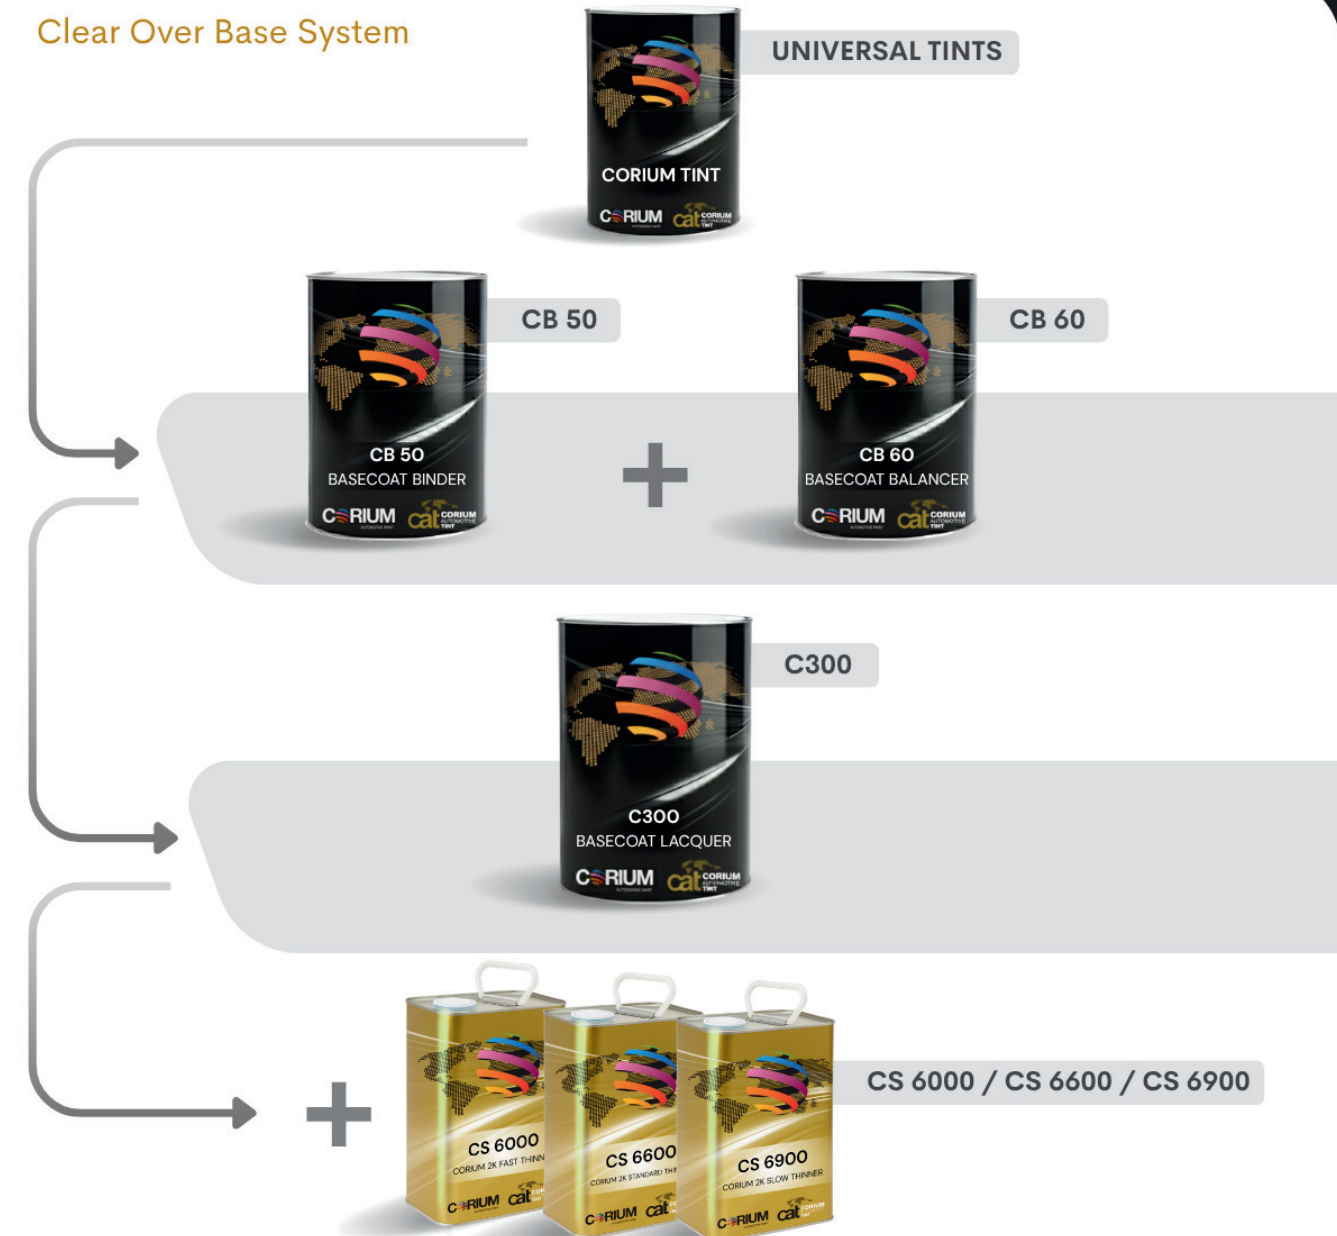

PRODUCT PREPARATION

MIXING RATIO 	FAST STANDARD SLOW			NOT APPLICABLE 	POT OF LIFE AT 30°C 	SPRAY VISCOSITY @30°C 	FLASH TIME 	DRYING TIME @30°C
	C300	1	1					
	CS 6000	0.8	-					
	CS 6600	-	0.8					
SPRAY EQUIPMENT 	Gravity	1.2-1.4mm	15-20mm	SPRAY PRESSURE 	Gravity feed	: 1.5 - 2.5 bar	AMOUNT OF COATS 	UNTIL FLAT BETWEEN COATS
	Suction	1.6-1.8mm	15-20mm		Suction feed	: 1.5 - 2.5 bar		
	HVLP	1.3-1.5mm	10-15mm		HVLP	: 0.65 bar at nozzle		
	Pressure	1.0-1.2mm	15-20mm		Pressure feed	: 1.5 - 2.5 bar		

SAFETY INSTRUCTIONS

1. Keep container tightly closed in a well ventilated place. Keep away from sources of ignition - No Smoking.
2. Do not breathe vapour, avoid contact with skin and eyes.
3. During spraying, wear suitable air-fed respiratory equipment.